

PL-2000M

200G Coherent Optical Transport



High transport capacity 200G muxponder/transponder over a single wavelength

Features Overview

- User-configurable muxponder and transponder operation modes
- Supported clients: 10G/40G/100G LAN, 8G/16G/32G Fibre Channel, STM-64/OC-192, SONET/SDH, OTU2/OTU2e/OTU3/OTU4 OTN
- 200G uplink aggregation, using any mix, for example: up to 20x10G (multi-rate) clients, 2x100G clients, 1x100G + 10x10G clients, 4x40G + 4x10G clients
- Forward error correction (FEC)
- 200G pluggable CFP2 coherent (ACO) tunable DWDM line interface
- Operation modes:
 - 16QAM 200G metro ~650km
 - DP-QPSK 100G long haul ~4000km
- Layer-1 GCM-AES-256 encryption
- Diffie-Hellman key exchange
- Line and service performance monitoring
- Optional integrated EDFA, mux/demux and optical switch
- Facility protection using an optional integrated optical switch
- Remote management with in-band GCC or out-of-band OSC
- Dual AC or DC pluggable power supply and pluggable fan unit
- Supports standard MSA pluggable SFP+, QSFP+, QSFP28 and CFP2
- 1U footprint with low power consumption

Data Center Interconnect and Metro Applications

The PL-2000M is an advanced 200G multi-protocol multi-rate solution for building high capacity optical transport networks. This 1U platform with flexible architecture enables the same device to be used in multiple applications and to adapt to network growth and changes.

Main Benefits


- **Cost-effective 200G capacity over single wavelength**
- **Highly integrated 1U muxponder and transponder**
- **Supports flexible mix of client interface protocols**
- **Embedded GCM-AES-256 encryption for all protocols**
- **User-configurable 100G/200G operation mode**

Modular and Cost-effective 200G Transport Solution

The PL-2000M provides a modular and cost-effective way of rolling out services or uplifting existing network capacity. It is low power consumption, saves rack space and reduces the overall solution CAPEX and OPEX by increasing the capacity of enterprise DCI and metro networks.

The PL-2000M can multiplex 2x100G clients into a single coherent CFP2 uplink, providing low cost high spectral efficiency.

The device seamlessly integrates with PacketLight's products to deliver carrier grade, high-end 200G solutions.

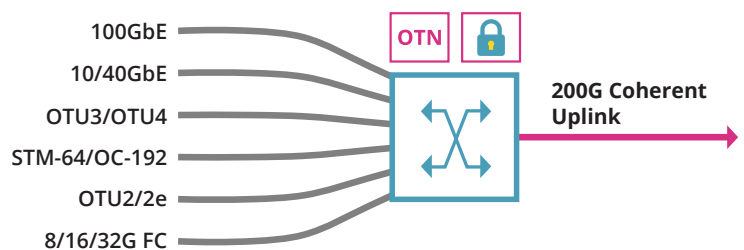

200G Muxponder/Transponder

Recommended for the following applications:

- High conformance 100G for alien wavelength applications
- Metro network applications ranging up to 1,000km
- High capacity DCI for enterprise, campus and cloud computing networks
- 200G links to bolster existing OTN/DWDM infrastructure
- Last mile access/aggregation CPE for 10G/40G/100G managed services
- Secured and encrypted communication for all protocols



Layer-1
encryption



Low power
consumption



1U rack mount



Multi operation
modes

Technical Specifications

Product Configurations

Single 20x10G Muxponder: Up to 20 multi-service 10G clients aggregated to 1x200G uplink

40G and 16x10G Muxponder: 40G LAN + up to 16 multi-service 10G clients aggregated to 1x200G uplink

Dual 40G and 12x10G Muxponder: 2x40G LAN + up to 12 multi-service, 10G clients aggregated to 1x200G uplink

Dual 100G Transponder: 2x100GbE LAN mapped to 1x200G uplink

100G Transponder and 10x10G Muxponder: 100GbE LAN + 10x10G mapped to 1x200G uplink

Optical Amplifiers: Optional up to two EDFA modules

Mux/Demux: Optional 2ch mux/demux module

Optical Switch: 1+1 facility protection

Uplink Characteristics

Bit Rate:

- 200G OTUC2V2 - 2x132.2680Gbps
- 100G OTU4V2 - 131.1026Gbps

Optical Interface: CFP2 coherent (ACO)

Tune-ability range:

- DWDM ITU-T G.694.1 GRID
- Channels 13-60.5, with 50GHz spacing

FEC Support:

- Standard ITU-T G.709 GFEC
- Enhanced HD-FEC, or SD-FEC

Optical Output Power:

- 100G: -2dBm to +3dBm
- 200G: -5dBm to 0dBm

OSNR:

- 100G: 12dB at 0.1nm
- 200G: 23dB at 0.1nm

Sensitivity:

- 100G: -21dBm
- 200G: -18dBm

Optical Monitoring: Tx and Rx power, dispersion, OSNR

Client Interfaces Characteristics

Service type:

- 10GbE LAN, 40GbE LAN, 100GbE, 8G/16G/32G FC, STM-64/OC-192
- OTU2, OTU2e, OTU4

Optical Interface:

- SFP+: LR (1310nm), SR (850nm), ER (1550nm), ZR (1550nm), C/DWDM
- QSFP+: LR4 (1310nm), ER4 (1310nm), SR4 (850nm), LR PSM
- QSFP28: LR4 (1310nm), ER4 (1310nm), SR4 (850nm), CWDM4 (CWDM)

Amplifier

Applications: Booster, pre-amp

Output Power:

- Booster: +4 to +14dBm
- Pre-amp: +5dBm

Input Power:

- Booster: 0 to +10dBm
- Pre-amp: -25 to -9dBm

Gain:

- Booster: +4 to +14dB
- Pre-amp: +18dB

Operating Modes:

- Automatic gain control (AGC)
- Automatic power control (APC)

Network Management

Management Ports:

- 2xRJ-45 LAN port 10/100MBase-T
- 2xSFP MNG ports 100/1000MBase-X
- RJ-45 serial port
- RJ-45 external alarm port
- OTN in-band GCC channel

Protocols: SNMP, HTTP, HTTPS, Telnet, SSH, Syslog, RADIUS, SNMP, TFTP & FTP

Management:

- Web browser over HTTP/HTTPS,
- PacketLight LightWatch™ NMS/EMS, or third party NMS over SNMP
- CLI over RS-232 or CLI over Telnet/SSH

OAM:

- Facility loopback (client and line interfaces), PRBS, event log, alarms
- Automatic laser shut-down (ALS)

Performance Monitoring:

- Layer-1 PM for all services (except for 32G FC)
- Layer-2 PM for Ethernet
- OTN PM for uplinks
- Optical power Rx levels for all optical ports

Visual Indicators: LED status indicators for client and line ports, Management and LAN ports, amplifier/s, system Critical/Major/Minor and Power Supply

Software Upgrade: Hitless traffic - dual image

Power Supply

AC/DC: 100 to 240 VAC, 50/60 Hz, -36 to -60 VDC, 250W max

PSU Redundancy: Single/dual feeding, hot swappable

Cooling Unit: Hot swappable fan unit

Environmental

Operating Temperature: -5°C to 50°C (+23°F to +122°F) operational

Humidity: 5% to 85% RH

Physical Dimensions

1U:

- 1.77" (H) x 17.32" (W) x 11.22" (D)
- 45mm (H) x 440mm (W) x 285mm (D)

Weight: 8.5kg / 18.75lb (max)

Mounting: 19", ETSI and 23"

Encryption

Functionality: Full speed, transparent Layer-1 encryption for selected clients or for the OTU4 uplinks

Compliance: FIPS 140-2 Level 2 certified, Common Criteria EAL2 certified, CNSA Top Secret Suite B 2015

Algorithms:

- Encryption/decryption: GCM-AES-256
- Message digest: SHA-384

Authentication:

- Role-based user/password authentication

Note: For specific countries, models that include Layer-1 GCM-AES-256 based encryption will be marked with the suffix C.

Approvals & Standards

- CE, FCC, RoHS, REACH
- NEBS ready



For more information please contact us at www.packetlight.com

© 2020 PacketLight Networks Ltd | All rights reserved | Information subject to change without notice.